

TFT™ Perfluoropolyether (PFPE)


Teflus® PE Series

PET Series (Thermal Conduction)	PEV Series (Vacuum Pumps)	PES Series (Vapor Phase Soldering)
Teflus® PET	Teflus® PEV	Teflus® PES
PET-55 ~ PET-270	PEV-L1 ~ PEV-L4 PEV-H1 ~ PEV-H4	PES-200 ~ PES-260
PEG Series (General Purpose)	PEL Series (Lubricant oil)	PEA Series (Processing Additive)
Teflus® PEG	Teflus® PEL	Teflus® PEA
PEG-1 ~ PEG-5	PEL-5 ~ PEL-520	PEA-1 ~ PEA-3

Perfluoropolyether (PFPE)

TFT LIMITED perfluoropolyether (PFPE) is synthesized by the polymerization of hexafluoropropylene monomer (HFP, $\text{CF}_3\text{CF}=\text{CF}_2$) and oxygen, and a colorless and transparent liquid is obtained after post-treatment.

Chemical structure:

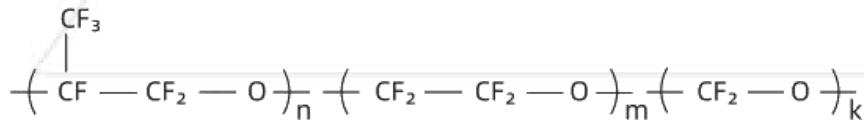

Product Features:

- > For most highly corrosive chemicals, such as strong acids, peroxides, etc., it has excellent chemical inertness.
- > It has the characteristics of high density, low surface tension, low volatility, non-combustibility, good insulation, good lubricity, etc., and has good compatibility with plastics, rubber and metals.
- > It is often used as a heat transfer fluid for many working conditions and as a lubrication use, suitable for high temperature and harsh working environments.
- > In the absence of an effective catalyst, PFPE remained stable in the range of 270°C-300°C, even in the presence of oxygen. Its decomposition temperature can reach 350°C-410°C.

Types, grades and applications:

Type	Grade	Application
Thermal Conduction	Teflus® PET	Used in coolant or heat transfer fluid in chemical, semiconductor, nuclear, pharmaceutical and other industries.
Vacuum Pumps	Teflus® PEV	Used as vacuum pump oil to meet the requirements of vacuum pumps for the highly clean electronics industry; Vacuum mechanical pumps for the production of semiconductors using ion etching, LPCVD and plasma culture technologies; Vacuum pumps (rotary vane pumps, molecular pumps, diffusion pumps, etc.) used in environments where corrosive gases are present.
Vapor Phase Soldering	Teflus® PES	Used as vapor phase soldering fluid in the vapor phase soldering (VPS) process, the latent heat of condensation of perfluoropolyether oil vapor is used to melt the solder.
General Purpose	Teflus® PEG	Low viscosity perfluoropolyether can be used as heat transfer fluid, electronic cleaning fluid, electronic reliability test fluid, vapor phase welding fluid, mainly suitable for cleaning of electronic products, heat transfer, testing and welding of electronic products, and can also be used in other chemical-resistant occasions; High viscosity perfluoropolyether can be used as lubricating oil, used in oxygen, fluorine, chlorine, hydrogen and other gas compressors, transfer pump lubrication, can also be used as vacuum pump oil, to meet the requirements of vacuum pumps for high cleanliness electronics industry. It can be used as a polymer processing aid to improve the fluidity and self-lubrication of polymers, reduce wear and improve scratch resistance.
Lubricant Oil	Teflus® PEL	Mainly used in chemical, electronic, machinery, aerospace, nuclear industry and other fields, used in oxygen, fluorine, chlorine, hydrogen and other gas compressors, lubrication of transfer pumps, etc.; It is used for the lubrication of hard disks and other magnetic recording media on computers and other instruments; as a lubricant for high temperature and chemically stable porous metal bearings, conveyor belts, paper and textile machinery; for the lubrication of rocket nozzles; for lubrication of missile launch systems; lubrication for anti-lock braking systems; Used for lubrication in the nuclear industry, etc.
Polymer Processing Additive	Teflus® PEA	As a polymer processing aid to improve process ability (e.g. improved flow ability, extrusion rate and mold release, reduced melt viscosity, reduced die build-up) and improved polymer properties (e.g. enhanced self-lubrication, reduced wear, improved scratch resistance). It can be used for acetal, nylon 6, nylon 12, thermoplastic polyurethane (TPU), SEBS, thermoplastic elastomer (TPE), etc.

Perfluoropolyether (Lubricant Oil) Teflus® PEL

Product Features:

- > The ozone depletion index is zero.
- > Excellent low temperature starting torque low evaporation loss.
- > Non-toxic, does not react with metal, plastic, rubber, good compatibility with grease.
- > Completely flame retardant, no flash point, no ignition point, no spontaneous ignition point, will not burn in the presence of oxygen.
- > High viscosity index, good viscosity, low freezing point, suitable for a wide temperature range.
- > Excellent thermal stability, chemical stability, solvent resistance, radiation resistance, weather resistance, insulation and dielectric properties.

Product Performance:

Property	Test Method	Unit	Technical Standards												
			L-5	L-7	L-15	L-22	L-32	L-46	L-68	L-100	L-150	L-220	L-320	L-460	L-520
ISO Viscosity Grade			5	7	15	22	32	46	68	100	150	220	320	460	460
Appearance	Visual Check	-	Colorless transparent liquid												
Density (20°C)	GB/T 29617	g/cm ³	1.84	1.86	1.88	1.89	1.89	1.90	1.90	1.91	1.91	1.91	1.91	1.91	1.91
Dynamic Viscosity(20°C)	NB/SH/T 0956	mm ² /s	12	17	40	60	95	130	155	300	490	780	1200	1600	1800
Dynamic Viscosity(40°C)	NB/SH/T 0956	mm ² /s	5	7	15	22	32	46	68	100	150	220	320	460	505
Dynamic Viscosity(100°C)	NB/SH/T 0956	mm ² /s	1.50	1.90	3.18	4.12	5.15	6.6	8.7	12	16.5	22.5	31.8	43	47
Viscosity Index	GB/T 1995	-	-	-	56	76	84	92	99	110	116	125	138	145	149
Pour Point	GB/T 3535	°C	-70	-65	-56	-51	-47	-46	-43	-34	-30	-26	-25	-22	-20
Evaporation WeightLoss (120°C, 22hr)	SH/T 0661	%	75	55	8.5	3	1.5	1	0.5	0.1	-	-	-	-	-
Evaporation WeightLoss (204°C, 22hr)	SH/T 0661	%	-	-	-	-	-	-	-	13	1.9	1.5	1.3	1.0	0.5
Neutral ization Number(KOH)	NB/SH/T 0434	mgKOH/g	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01

Note: The above data is typical data.

Product Application:

- > It mainly used as lubricating oil for compressors and delivery pumps for gases such as oxygen, fluorine, chlorine and hydrogen etc. It can also be used for the lubrication of rocket nozzles missile launching system and anti-lock braking system, as well as other lubrication applications in nuclear industry.

Package and Shipment:

- > PE plastic drum, available in 1 kg, 5 kgs, 10 kgs, or according to customers' requirements.
- > It is shipped as non-dangerous liquid goods.

Storage:

- > Avoid to mix with other oils, long-term storage after sealing in a dry environment.
- > Avoid contact with aluminum chloride and other Lewis acid.

Handling Precautions:

- > It does no harm to eyes, skin, or other human organs. Please rinse excessively with running water if accidentally exposed.
- > Please do not contact this product with Lewis acid to avoid decomposing.
- > Please do not discard the waste oil and packaging uncautiously.
- > For other safety issues, please review MSDS of the product or contact sales representatives.



TFT LIMITED

Fluoro Organic Materials

**We might adjust the grades and properties of our products without any further notices.
If the up-to-date information is needed,
please contact us.**

Manufacturer:

[Guang Zhou Office]

Unit 1006, 10th Floor, Tower B, NO.26 ChenYue Road, HaiZhu District GuangZhou,
CHINA

Tel: +86.20.8918.9425

[Hong Kong Office]

Unit 1101, 11th floor, Tower 1, Enterprise Squar Bldg, No. 9 Sheung Yuet Road,
Kowloon Bay, Hong Kong.

Tel: +852.2893.5300

<http://www.teflus.com>

E-mail: tftlimited_xu@163.com
